



Indoor Unit type Daikin Comfora FTXP-M

F-Gas Certified

To be able to purchase this product we must hold a copy of your company F-Gas Certification on your account.

Links to accepted certification

[REFCOM](#)

[F-Gas](#)

Brand

- Daikin

Product

- Comfora - Indoor Unit

Application

- Cooling or Heating

Advantage

- Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- Onecta app (optional): control your indoor from any location with an app, via your local network or internet.
- Voice command via Amazon Alexa or Google Assistant to control main functions such as set point, operation mode, fan speed, etc
- Silver allergen removal and air purifying filter captures allergens such as pollen to ensure a steady supply of clean air
- 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- The unit's compact dimensions makes it ideal for renovation projects, especially for above door installation
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- Seasonal efficiency values up to A++ in cooling and heating
- Space saving contemporary wall mounted design
- Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.

Function

- Air-2-Air, Heatpump, Inverter Driven

Refrigerant

- R32

Daikin Comfora FTXP- M

- Daikin
- Wall Mounted
- Comfora FTXP-M
- Air-2-Air, Heatpump, Inverter Driven
- Cooling 2.0kW - 7.1kW
- Heating 2.5kW - 8.2kW
- R32
- Residential Product

R-32



Features

- Onecta app (optional)

Control your indoor climate from any location via smartphone or tablet

- Econo mode

Decreases power consumption so that other appliances that need large power consumption can be used. This function is also energy saving.

- Energy saving during standby mode

Current consumption is reduced by about 80% when operating on standby.

- Night set mode

Saves energy, by preventing overcooling or overheating during night time.

- Fan only

The unit can be used as fan, blowing air without heating or cooling.

- Comfort mode

Guarantees draught free operation by preventing that warm or cold air is directly blown on to the body.

- Powerful mode

Can be selected for rapid heating or cooling; after the powerful mode is turned off, the unit returns to the preset mode.

- Auto cooling-heating changeover

Automatically selects heating or cooling mode to achieve the set temperature.

- Indoor unit silent operation

"Silent" button on the remote control lowers the operation sound of the indoor unit by 3dB(A)

- 3-D air flow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.

- Vertical auto swing

Possibility to select automatic vertical moving of the air discharge flaps for efficient air and temperature distribution throughout the room.

- Horizontal auto swing

Possibility to select automatic horizontal moving of the air discharge louvre, for uniform air flow and temperature distribution.

- Auto fan speed

Automatically selects the necessary fan speed to reach or maintain the set temperature.

- Fan speed steps (**5 steps**)

Allows to select up to the given number of fan speed.

- Dry programme

Allows humidity levels to be reduced without variations in room temperature.

- Silver allergen removal and air purifying filter

Captures allergens such as pollen and dust mites. The filter suppresses pollen and mites for 99% or more.

- Practically inaudible

Practically inaudible: the unit runs so quietly, you will almost forget it is there.

- Titanium apatite deodorising filter

Decomposes bothersome odours of for example tobacco and pets

- Air filter

Removes airborne dust particles to ensure a steady supply of clean air.

- 24 hour timer

Can be set to start operation anytime during a 24 hour period

- Infrared remote control

Starts, stops and regulates the air conditioner from a distance.

- Auto-restart

The unit restarts automatically at the original settings after power failure.

- Self diagnosis

Simplifies maintenance by indicating system faults or operating anomalies.

- Multi model application - up to 3 indoor units

Up to 3 indoor units can be connected to a single outdoor unit, even if they have different capacities. All indoor units can individually be operated within the same heating or cooling mode.

Operating tips

Keep fan running when reaching set point (**FTXP Fan Motor IR Commands**)

Applicable outdoor units

- Type **RXP 20/25/35/50/60/71 M**

- Type 2MXM40A/2MXM50A/2MXM68A (**ONLY FTXP 20/25/35 M9**)

- Type 3MXM52A/3MXM68A (**ONLY FTXP 20/25/35 M9**)

Applicable controller

ARC480A53

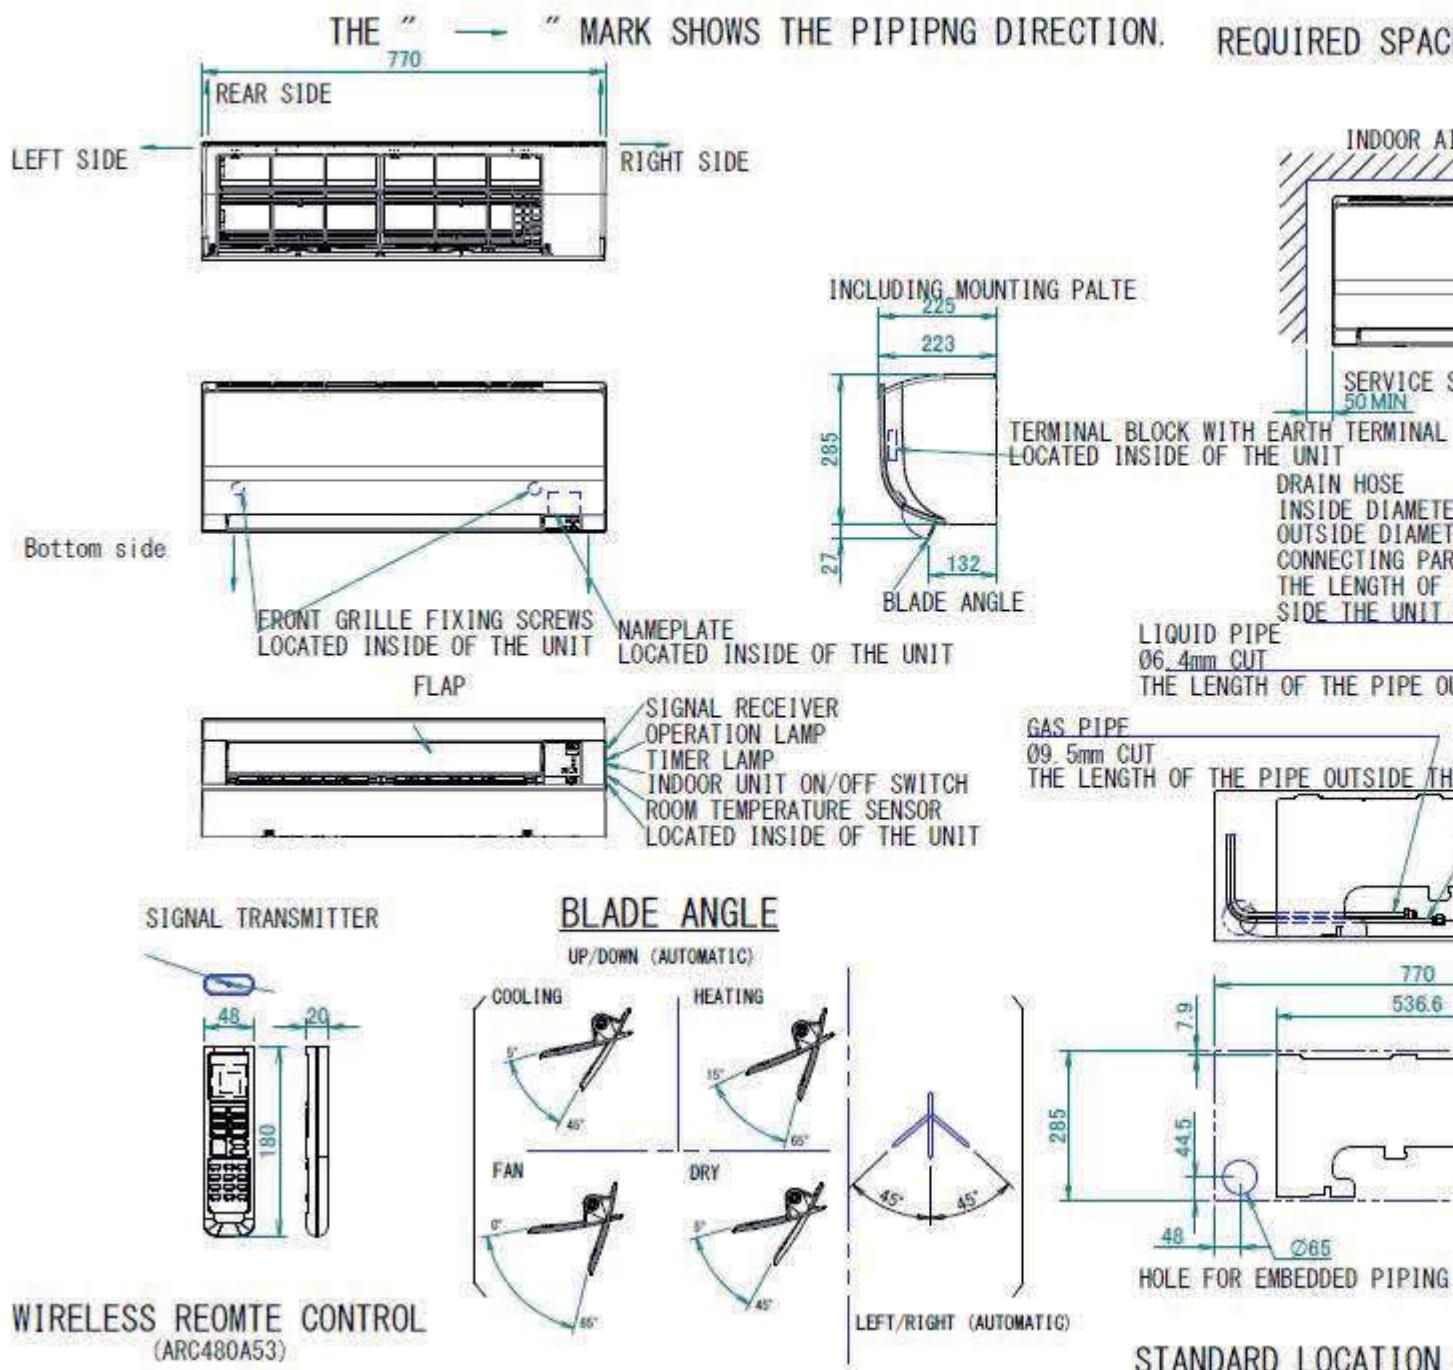
Remote Controller

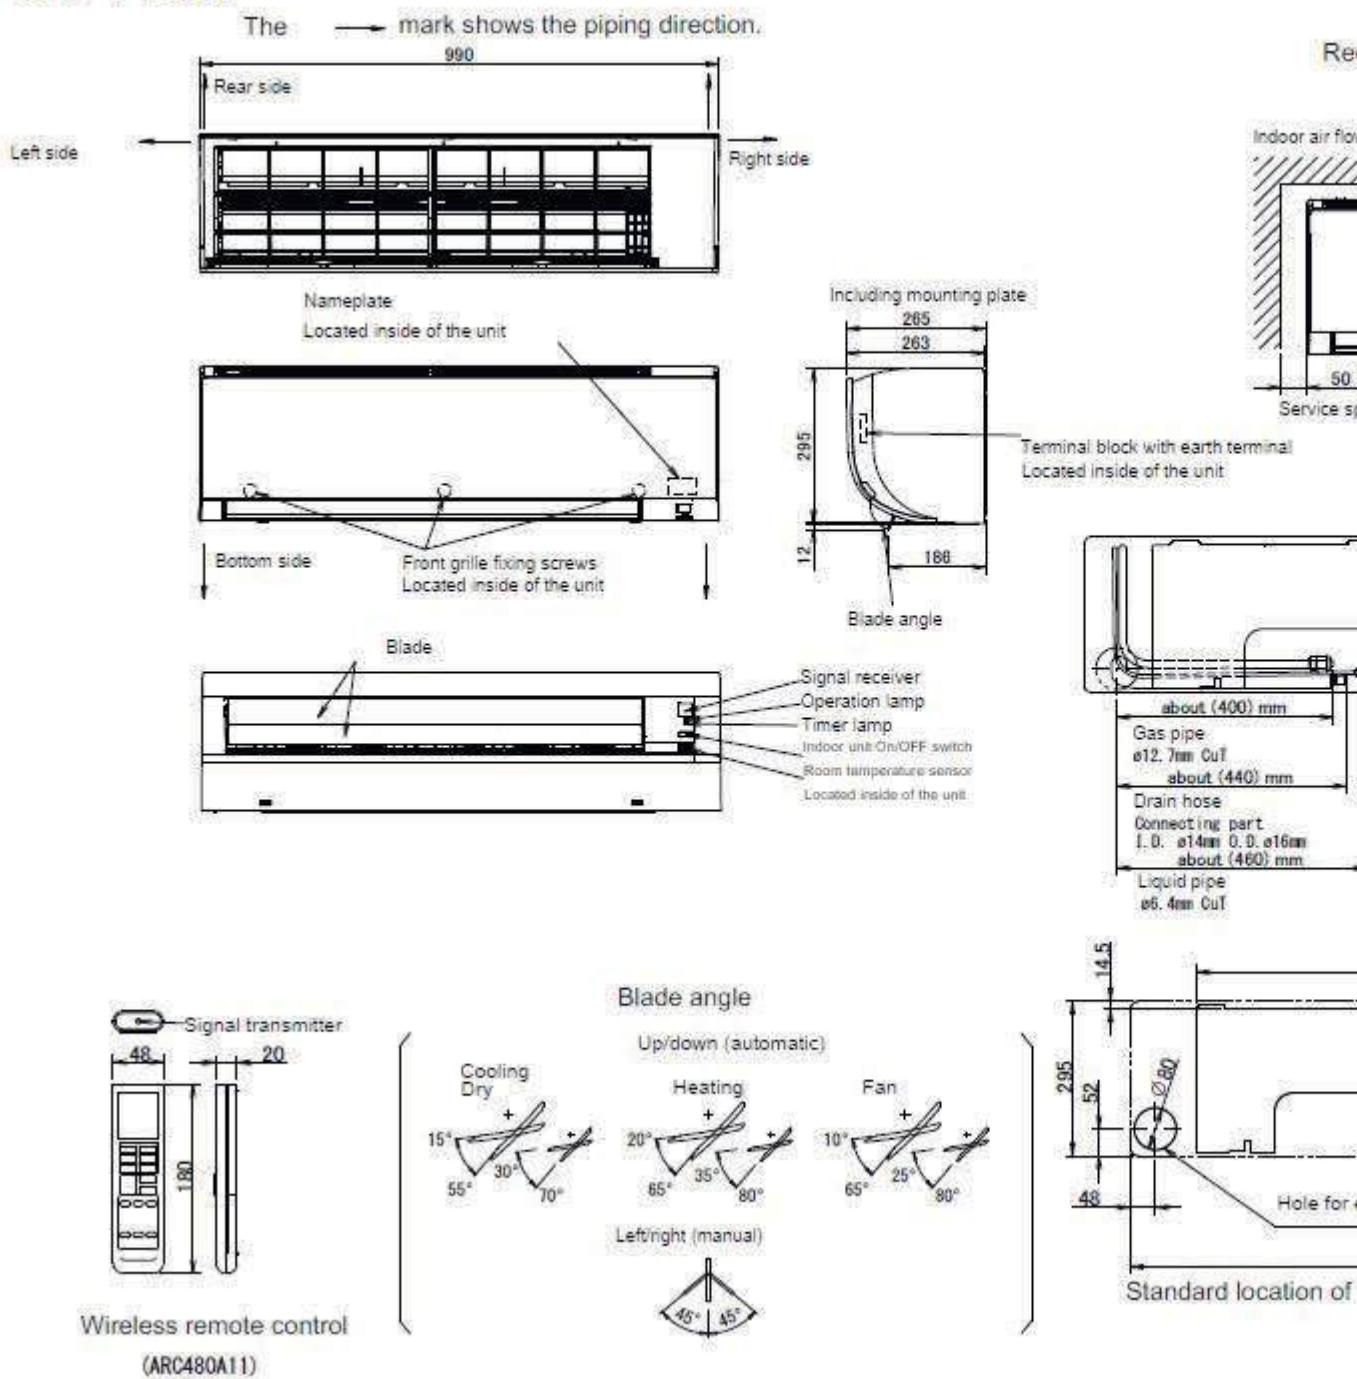


Accessories

- EKRS21 - Wire harness for new S21 port for all marked (*) options - required for FTXP-M only
- BRC073* - Optional wired remote controller BRC1E53A style - Connection cable required
- BRCW901A03 - 3m connection cable for BRC073
- BRCW901A08 - 8m connection cable for BRC073
- BRP069B45 - Wifi adaptor for connection to on-line controller

Specifications						
Indoor Units	FTXP20M9	FTXP25M9	FTXP35M9	FTXP50M	FTXP60M	FTXP71M
Capacity	UK Total Cooling kW 1.95	2.44	3.42	4.89	5.86	6.93
	UK Sensible Cooling kW 1.69	1.94	2.49	3.42	4	4.73
	Nominal Cooling kW 2	2.5	3.5	5	6	7.1
	Nominal Heating kW 2.5	3	4	6	7	8.2
Seasonal Efficiency (EN14825) COOLING	Energy Label A++	A++	A++	A++	A++	A++
	Pdesign kW 2	2.5	3.5	5	6	7.1
	SEER 6.79	6.92	6.62	7.3	6.82	6.2
	Annual Energy Consumption kWh 103	126	186	240	308	401
Seasonal Efficiency (EN14825) HEATING	Energy Label A++	A++	A++	A+	A+	A+
	Pdesign kW 2.2	2.4	2.8	4.6	4.8	6.2
	SCOP 4.65	4.61	4.64	4.4	4.1	4.01
	Annual Energy Consumption kWh 662	728	845	1463	1638	2166
Air Flow Rate (Cooling) High / Med / Low / Silent m ³ /sec	0.158 / 0.123 / 0.093 / 0.070	0.162 / 0.128 / 0.097 / 0.070	0.192 / 0.138 / 0.105 / 0.075	0.272 / 0.233 / 0.192 / 0.138	0.280 / 0.240 / 0.197 / 0.153	0.280 / 0.240 / 0.197 / 0.168
Dimensions	Height mm 286	286	286	295	295	295
	Width mm 770	770	770	990	990	990
	Depth mm 225	225	225	263	263	263
Weight kg	8.5	8.5	9	13.5	13.5	13.5
RAL Colour	RAL 9002	RAL 9002	RAL 9002	RAL 9002	RAL 9002	RAL 9002
Sound Pressure (Cooling) High / Med / Low / Silent dBA	39 / 33 / 25 / 19	40 / 33 / 26 / 19	43 / 34 / 27 / 20	43 / 39 / 34 / 27	45 / 41 / 36 / 30	46 / 42 / 37 / 32
Sound Pressure (Heating) High / Med / Low / Silent dBA	39 / 34 / 28 / 21	40 / 34 / 28 / 21	40 / 35 / 29 / 21	42 / 38 / 33 / 30	44 / 40 / 35 / 32	45 / 41 / 36 / 33
Sound Power (Cooling) dBA	55	55	58	59	60	62

Dimensions
FTXP20-35M9


Dimensions
FTXP50-71M


Installation

